


# Specifications: Model 316(60) NPT Valve

## Horizontal Flow

Flow Direction  
Arrow

Visual  
Status  
Window

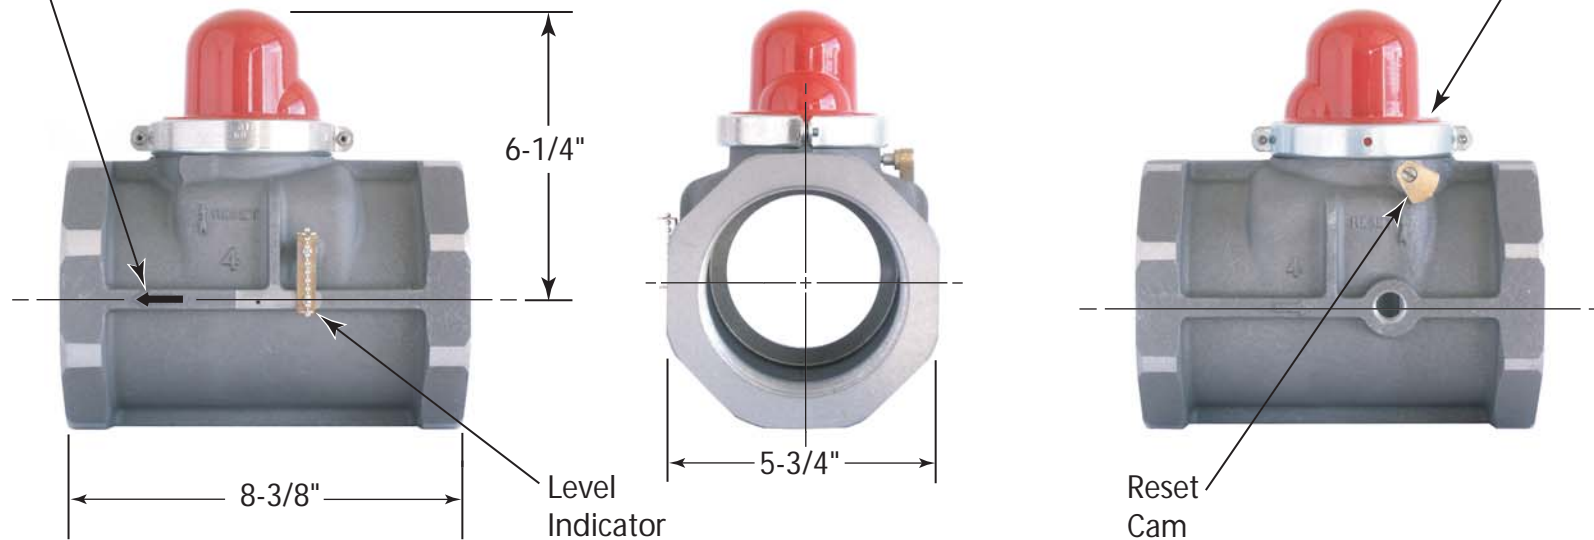

Valve Model#	CA-DSA No.	Length	Height	Octagon	Nominal Pipe Size	Threads Per Inch	APPLICATION	DATA
							Max. Pressure	Fuel
316	45R-113R	8-3/8"	6-1/4"	5-3/4"	4"	8	60 psi	Dry Fuel Gas

California Seismic Valves are UL listed in the USA and Canada, Certified by the California State Architect's Office, Approved by the City of Los Angeles, and are warranted free of manufacturer's defects for 30 years. All valves meet California Standards for Earthquake Actuated Automatic Gas Shut off Systems, Standard No. 12-23-1, ANSI Z21.70, 1981 and ASCE 25-97 Standards.



Contact: Measurement Controls, Inc.  
6131 Old Concord Rd.  
Charlotte, NC 28213  
Tel.: 704.921.1101 or Toll Free: 1.800.714.9486  
Web site: [www.measurementcontrols.com](http://www.measurementcontrols.com)  
E-mail: [sales@measurementcontrols.com](mailto:sales@measurementcontrols.com)

